




# HMSA BEARING MANUFACTURING LIMITED

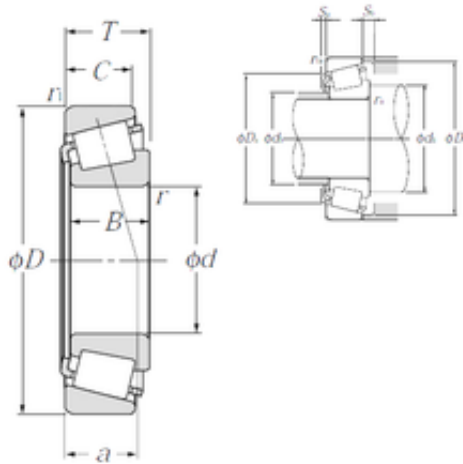

30 mm x 62 mm x 20 mm NTN 4T-32206C  
Single row tapered roller bearings

Bearing No. 4T-32206C

4T-32206C Bearing 2D drawings and 3D CAD models

Size	30x62x21.25 mm
Bore Diameter	30 mm
Outer Diameter	62 mm
Width	21,25 mm
d	30 mm
D	62 mm
T	21,25 mm
B	20 mm
C	17 mm
ra1 max.	1 mm
a	18,5 mm
r min.	1 mm
r1 min.	1 mm
da min.	35,5 mm
Da min	49 mm
Da max.	56,5 mm
db max.	35 mm
Db min.	59,5 mm
ra max.	1 mm
Sa	2 mm
Sb	5 mm
Weight	0,294 Kg
Basic dynamic load rating (C)	50 kN
Basic static load rating (C0)	60 kN
(Grease) Lubrication Speed	6 100 r/min



## HMSA BEARING MANUFACTURING LIMITED

(Oil) Lubrication Speed	8 100 r/min
Calculation factor (e)	0,56
Calculation factor (Y0)	0,59
rs min	1 mm
r1s min	1 mm
e	0.56
Y2	1.07
Y0	0.59
Mass	0.29 kg
ISO 355 reference	T3DC030
Dynamic load, C	50 kN
Rating life coefficient, A2	1.4
Static load, C0	60 kN
Fatigue limit load, Cu	7.3 kN
Nlim (oil)	8,100 rpm
Nlim (grease)	6,100 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
da max	35.5 mm
db min	35 mm
Da max	56.5 mm
Db min	59.5 mm
ra max	1 mm
r1a max	1 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
EAN	0692314825778
Weight / US pound	0
Product Group	B04334



# HMSA BEARING MANUFACTURING LIMITED